

Meeting Elevator Disconnect Requirements Is Now Easy & Fast

The Cooper Bussmann® Quik-Spec™ Power Module Offers Superior All-In-One Solution

NEW
Quik-Spec
Program

- **Easy To Specify**

Nothing to figure out. The Quik-Spec™ Power Module is factory configured. To order, just call your Cooper Bussmann representative with all relevant electrical and circuit information, and we do the rest.

- **Easy To Install**

Available as a switch (PS) for single elevator applications or as a panel (PMP) for multiple elevator applications, the Quik-Spec™ Power Module comes as a complete unit that installs quickly.

- **Provides Selective Coordination**

To meet this Code and end user requirement, the Quik-Spec™ Power Module Power Module utilizes Low-Peak® Class J fuses that can easily be selectively coordinated by using a 2:1 lineside-to-loadside fuse ratio with any other Cooper Bussmann Low-Peak fuse.

- **UL98 Listed**

The Quik-Spec™ Power Module Power Module meets prevailing ANSI/ASME, NEC® and NFPA 72 requirements in a UL98 Listed (enclosed switch) and UL50 Listed (enclosure) unit.



- **Quik-Spec Program**

Choose from five of the most popular, fully loaded switch, models that ship direct within three business days*.

- PS6T48R1KGBF3-X: 60A, 480V
- PS1T48R1KGBF3-X: 100A, 480V
- PS1T20R1KGBF3-X: 100A, 208V
- PS2T48R1KGBF3-X: 200A, 480V
- PS2T20R1KGBF3-X: 200A, 208V

*Contact your local Cooper Bussmann representative for details



Specify and Install the Quik-Spec™ Power Module with Confidence

The Quik-Spec™ Power Module is the best choice for design engineers or electrical contractors that need to meet these requirements, Codes and standards:

- Elevator Shutdown – ANSI/ASME A17.1 Rule 2.8.2.3.2
- Shunt Trip Voltage Monitoring – NFPA 72 6.15.4.4
- Integrity Monitoring – NFPA 72 6.15.2.1
- Allows Elevator Shutdown – NEC® 620.51
- Selective Coordination – NEC® 620.62
- Auxiliary Contact (Hydraulic Elevator) – NEC® 620.91(C)
- Orderly Shutdown – NEC® 240.12

With the Quik-Spec™ Power Module You Get:

- Shunt trip capability
- Selective coordination
- Fire safety signal interface
- Shunt trip voltage monitoring
- Component protection via Low-Peak® Class J fuses
- UL 98 Listed for 200kA short-circuit current rating
- Lockable in the open position with three lock capability
- Optional key-test switch and optional pilot light for easy inspection
- No annual calibration or testing of overcurrent protection required
- Padlockable for service work safety and open door “override” for troubleshooting

Notes: Always follow established safety practices when working on a electrically live equipment.




The Quik-Spec™ Power Module Switch (PS) for single elevator applications.



The Quik-Spec™ Power Module Panel (PMP) is available for multiple elevator applications. Longer leadtimes are required for these models.

Quik-Spec™ Power Module Switch Catalog Numbering System

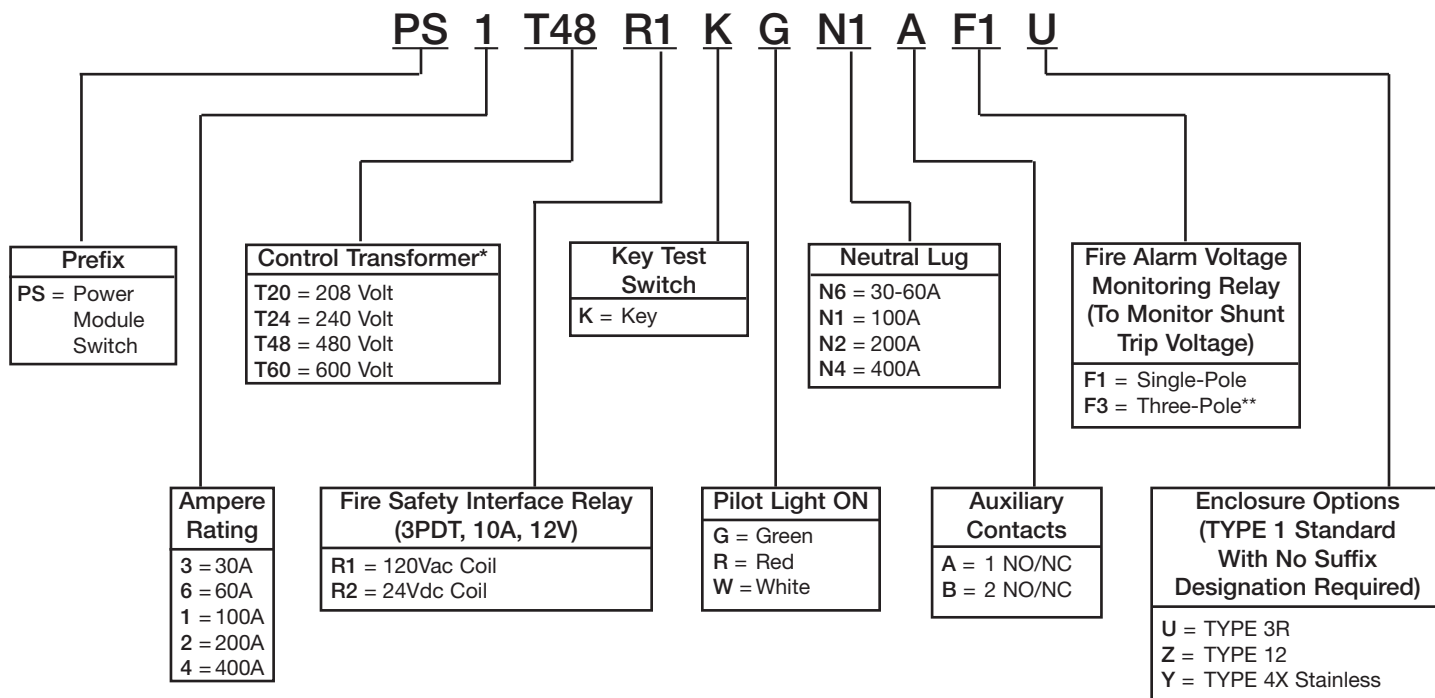

*100Va with Primary and Secondary fusing (120V Secondary)

**Only for use with R1 option

©2008 Cooper Bussmann
St. Louis, MO 63178
636-394-2877
www.cooperbussmann.com