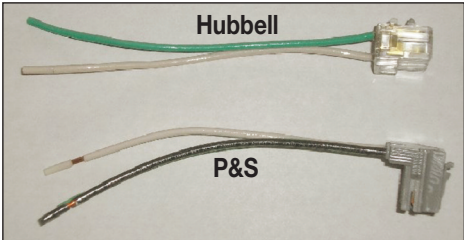
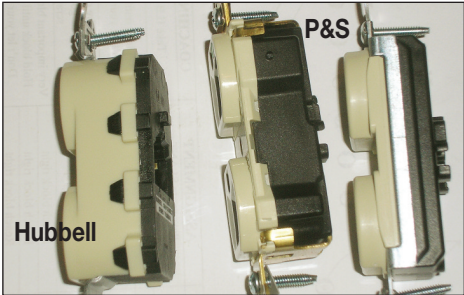
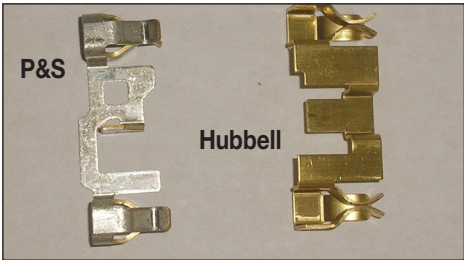


# PLUGTAIL™

## Competitive Products Comparison

**COMPETITIVE COMPARISON:**

### Pass & Seymour® PlugTail™ vs. Hubbell SnapConnect

PlugTail	SnapConnect	
<b>Tail Construction:</b>		
<ul style="list-style-type: none"> <li>• Right angle connectors for wire connection strain relief and less depth in the box.</li> <li>• Tight, secure connection with mating receptacle for added connection security.</li> <li>• UL File #E140596.</li> </ul>	<ul style="list-style-type: none"> <li>• Straight contacts create strain on the wire in the box.</li> <li>• No circuit label ID</li> </ul>	
<b>Receptacle Construction (not grade specific):</b>		
<ul style="list-style-type: none"> <li>• Depth (strap to back body): PlugTail Widebody: .866" PlugTail Phase II: .625"</li> <li>• Depth with Installed Tail: PlugTail Widebody = 1.25" PlugTail Phase II = 1.0"</li> </ul>	<ul style="list-style-type: none"> <li>• Depth (strap to back body): 1"</li> <li>• Depth with Installed Tail: 1.55"</li> </ul>	
<b>Components:</b>		
<p><b>CONTACTS</b></p> <ul style="list-style-type: none"> <li>• Nickel plated 688 Brass</li> </ul> <p><b>STRAP MATERIAL</b></p> <ul style="list-style-type: none"> <li>• Brass – Wrap Around style with locking tabs for face base security</li> </ul> <p><b>COVER</b></p> <ul style="list-style-type: none"> <li>• Nylon</li> </ul> <p><b>COVER SECURITY</b></p> <ul style="list-style-type: none"> <li>• PlugTail (narrow) – 3 drive screws and wrap around strap</li> <li>• PlugTail (wide) – 2 drive screws and locking strap tabs</li> </ul> <p><b>BACKBODY</b></p> <ul style="list-style-type: none"> <li>• Nylon</li> </ul>	<ul style="list-style-type: none"> <li>• Brass – no coating</li> <li>• Brass – Resi style through strap</li> <li>• Nylon</li> <li>• 3 drive screws and snap together body</li> <li>• Nylon</li> </ul>	

**NOTES:**

- Hubbell SnapConnect Point of manufacture – China.